


# IES 4422N LED Head

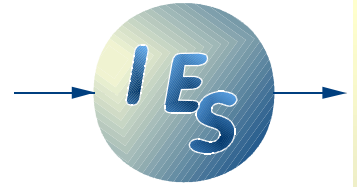

## PRELIMINARY SHORTFORM DATA

Modular LED Head for high speed video.

- ☺ **12000 lm**
- ☺ **Selectable illumination angles 27°, 35°, 60°, 120°**
- ☺ **Mounting plates for double and quad arrays available**
- ☺ **Dimensions 79 x 65 x 23 mm<sup>3</sup>**



(a mounting plate for a double array is also shown from its backside)


**IES** Ingenieurbüro für Elektronikentwicklung und Spezialgerätebau

Postanschrift  
In den Waashainen 2  
D-38108 Braunschweig


FON +49 531 701273-0  
FAX +49 531 701273-19

Bankverbindung Postbank Hannover  
BLZ 250 100 30, Konto 905 693 302  
USTIDNr. DE 177335140

### Mount Information

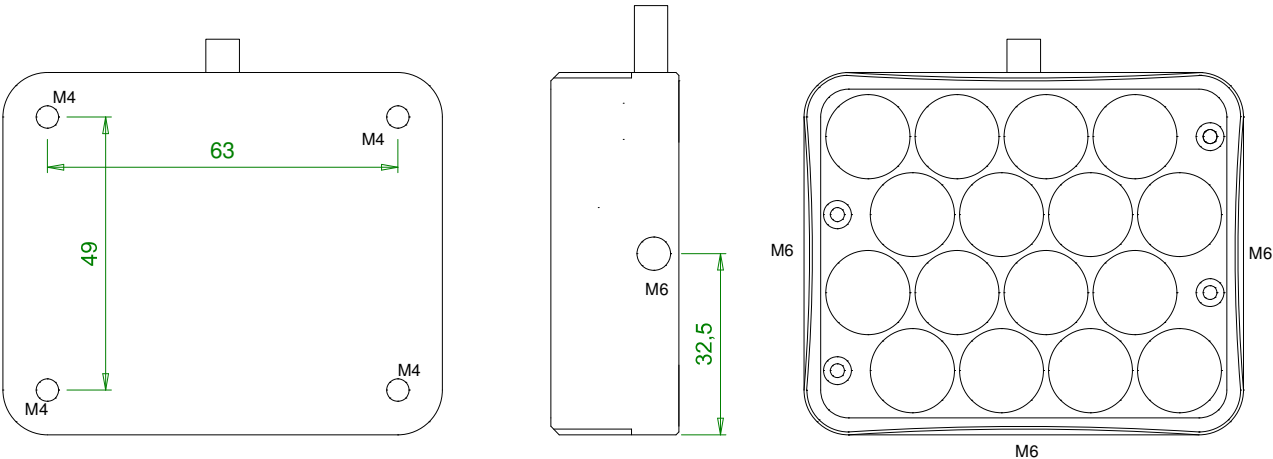

### LED-Head

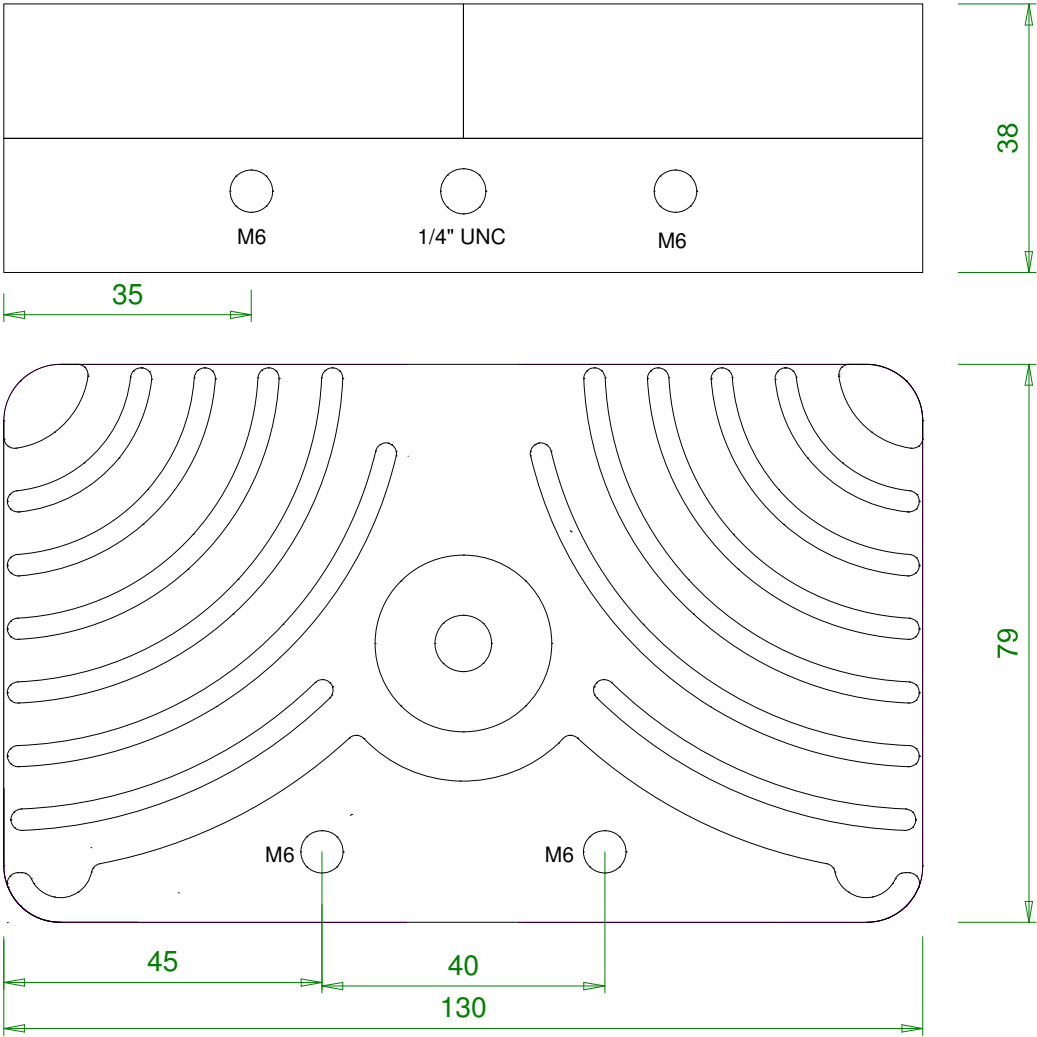

Mount plate for dual array

## Specifications

<b>Metrics</b>	
Dimensions	79 x 65 x 23 mm <sup>3</sup>
Weight	0.25 kg

<b>Environment</b>	
Temperature range	-20°C ... +70°C
Acceleration	100 g

<b>Electrical Interface</b>	
Connector	Lemo 1B.306
Cable	0.5 m cable

<b>Illumination Parameters</b>	
Illumination angle	27°, 35°, 60°, 120°
Lumen output	12000 lm

## Ordering information: IES 4422N

Also available:

- IES 4421 LED head 24000 lm
- IES 4422 LED head 12000 lm
- IES 4423 LED head 24000 lm
- IES 4425 LED head 48000 lm

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.  
Revision 2017-04