


IES 4432A LED Sync Lamp

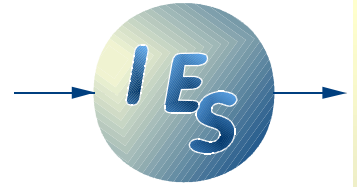

PRELIMINARY SHORTFORM DATA

Modular LED Sync Lamp for high speed video.

- ☺ **100 000 lm**
- ☺ **Horizontal mounting design**
- ☺ **Optional tilt drive system**
- ☺ **Selectable illumination angles**
- ☺ **Dimensions 534 x 116 x 70 mm³**
- ☺ **Internal LED Controller**
- ☺ **Internal peak power buffer**



IES Ingenieurbüro für Elektronikentwicklung und Spezialgerätebau

Postanschrift
In den Waashainen 2
D-38108 Braunschweig

FON +49 531 701273-0
FAX +49 531 701273-19

Bankverbindung Postbank Hannover
BLZ 250 100 30, Konto 905 693 302
UStIDNr. DE 177335140

Specifications

Metrics	
Dimensions (single module)	534 x 116 x 70 mm ³
Weight (single module)	5.5 kg

Environment	
Temperature range	0 ... 50°C

Electrical Interface	
Connector	D-Type 9 pins
Power supply	48 V, 1.2 A (per module)
Communication	RS-485
Sync	RS-485

Illumination Parameters	
Illumination angles	27°, 38°, 60°, 120°

Ordering information: IES 4432A

Also available:

- IES 4420 Mini LED Head 12000 lm
- IES 4421 Mini LED Head 24000 lm
- IES 4422 Mini LED Head 12000 lm
- IES 4423 Mini LED Head 24000 lm
- IES 4425 Mini LED Head 48000 lm
- IES 4432B LED Sync Lamp 100000 lm, vertical design
- IES 4412 Stationary LED Controller
- IES 4414 Onboard LED Controller, 12-16 channels
- IES 4415 Onboard LED Controller, 8 channels
- IES 4416 Onboard LED-Controller, 20 channels and camera support

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.

Revision 2015-03