


# IES 4432D LED Head

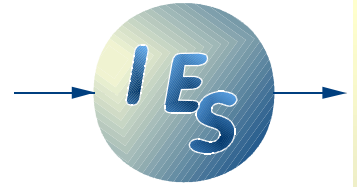

## PRELIMINARY SHORTFORM DATA

LED Head for high speed video. Usable in climate chambers.

- ☺ **48000 lm**
- ☺ **Selectable illumination angles 27°, 35°, 60°, 120°**
- ☺ **Wide temperature range -40°C ... +85°C**
- ☺ **Dimensions 271 x 68 x 38 mm<sup>3</sup>**




**IES** Ingenieurbüro für Elektronikentwicklung und Spezialgerätebau

Postanschrift  
In den Waashainen 2  
D-38108 Braunschweig

FON +49 531 701273-0  
FAX +49 531 701273-19

Bankverbindung Postbank Hannover  
BLZ 250 100 30, Konto 905 693 302  
USTIDNr. DE 177335140

# Mount information

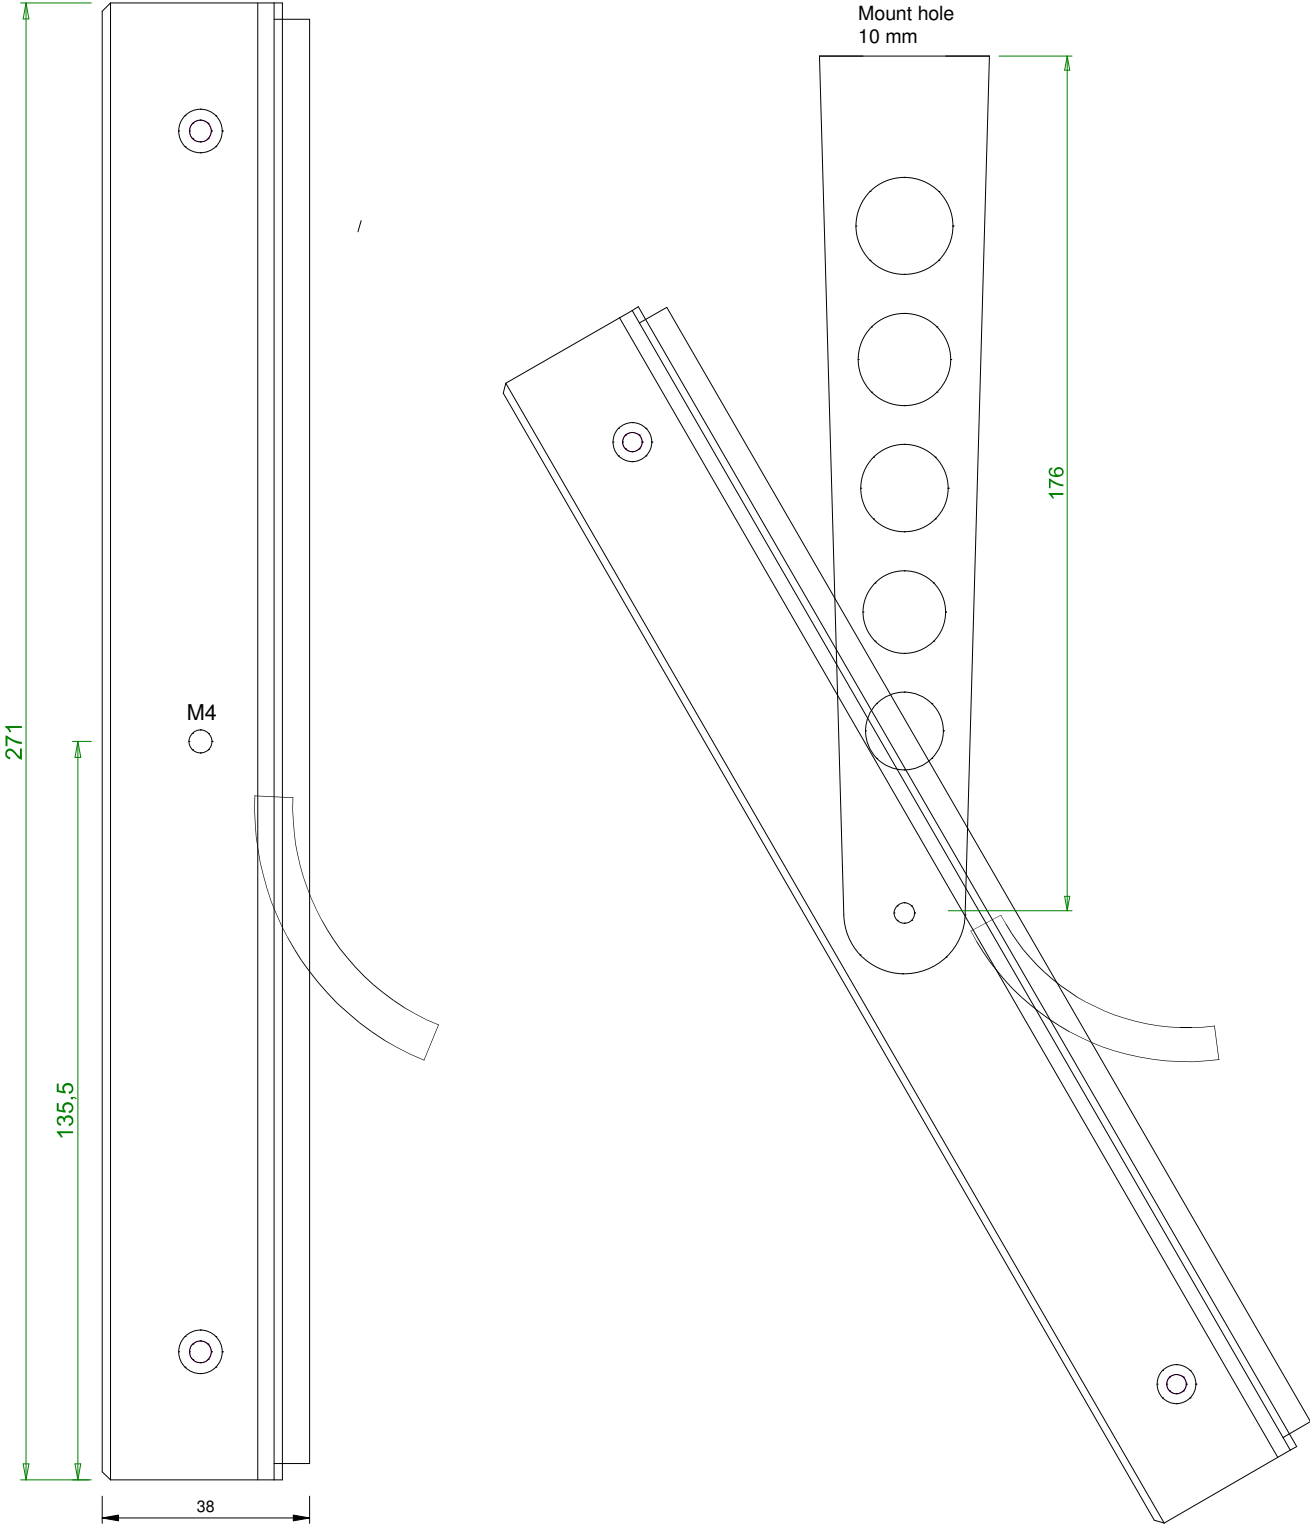

## Specifications

| <b>Metrics</b> |                               |
|----------------|-------------------------------|
| Dimensions     | 271 x 68 x 38 mm <sup>3</sup> |
| Weight         | 1.2 kg                        |

| <b>Environment</b> |                 |
|--------------------|-----------------|
| Temperature range  | -40°C ... +85°C |
| Acceleration       | not tested      |

| <b>Electrical Interface</b> |             |
|-----------------------------|-------------|
| Connector                   | Lemo 2B.310 |
| Cable                       | 6 m cable   |

| <b>Illumination Parameters</b> |                     |
|--------------------------------|---------------------|
| Illumination angle             | 27°, 35°, 60°, 120° |
| Lumen output                   | 48000 lm            |

### Ordering information: IES 4432D

Also available:

- IES 4421 LED head 24000 lm
- IES 4422 LED head 12000 lm
- IES 4423 LED head 24000 lm
- IES 4425 LED head 48000 lm

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.  
Revision 2017-04